

Heatcraft Coil Certified Drawing
STANDARD STEAM - SAME END CONNECTIONS CP 1071-E



Customer _____ Customer P.O. Number _____
 Job _____
 Written by _____ Date _____
 Approved by _____ Date _____

#	TAG	QTY	MODEL NUMBER						HAND Left, Right
			TYPE	FPI	ROWS DEEP	FIN	FH	FL	
1									
2									
3									
4									



#	DIMENSIONAL DATA								W			
	CONNECTION				H	I	J	L	M	FLANGES		
	SIZE	A	B	C						R	S1	S2
1												
2												
3												
4												

MATERIALS OF CONSTRUCTION	
FINS	AL CU St Stl
TUBES	CU CuNi St Stl
HEADERS	CU CuNi Carbon Stl St Stl
CONN	Carbon Stl Red Brass St Stl
CASING	AL Galvanized Steel CU Stainless Steel

GENERAL OPTIONS	
<input type="checkbox"/>	Inverted Flanges
<input type="checkbox"/>	End Plates Only
<input type="checkbox"/>	Label Kit
<input type="checkbox"/>	Mounting Holes
<input type="checkbox"/>	Corrosion Resistant Coating
<input type="checkbox"/>	FPT Connections

GENERAL INFO	
Steam Pressure	
Temperature °F	

REMARKS:

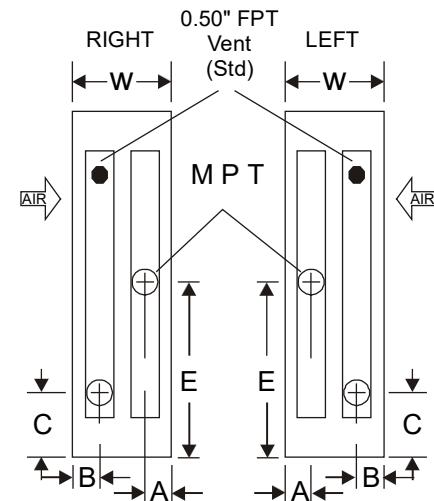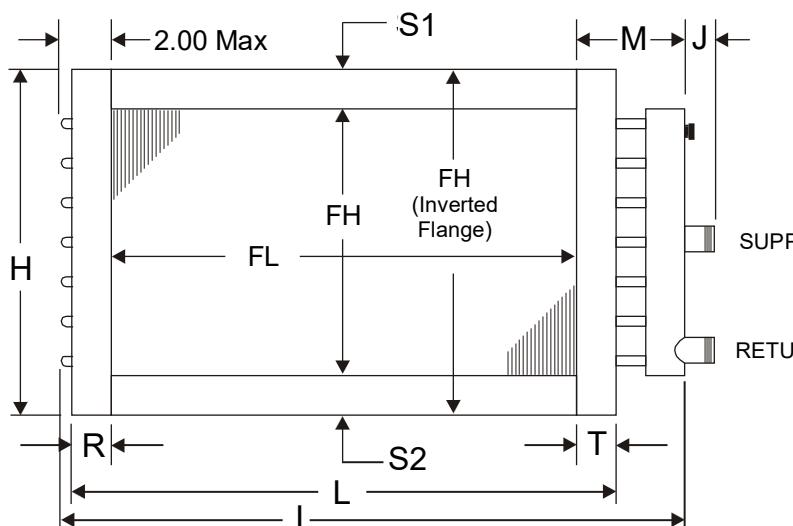

GENERAL NOTES

- Mounting holes are optional. 0.375" diameter holes on 6" centers from the centerline of the fin height and finned length are typical for all flanges. Not available with Inverted Flanges
- All dimensions are in inches.
- The supply line should be connected to the middle connection on the leaving air side for counterflow operation.
- Intermediate tube supports are fabricated from heavy gauge stock and supplied per the chart at the right.

Finned Length (FL)	Tube Supports
≤ 48	0
> 48 ≤ 96	1
> 96 ≤ 144	2
> 144	4